



Keydal KNV-200 pneumatic valves, designed in accordance with NAMUR standards, provide full compatibility with actuators. They feature easily convertible 3/2 and 5/2 configurations, allowing use with both single-acting and double-acting actuators.

Genel Özellikler


- NAMUR Connection Standard
- IP65 Standard Protection Class
- The valve body is manufactured from 6061-T6 aluminum alloy to ensure clean and durable threading.
- The coil is integrally encapsulated with thermosetting BMC, providing low temperature rise and long service life.
- The dynamic/static armature is made of German-origin stainless steel, ensuring fast response time.
- Suitable for use with both single-acting and double-acting actuators.
- Equipped with a metal manual override button.

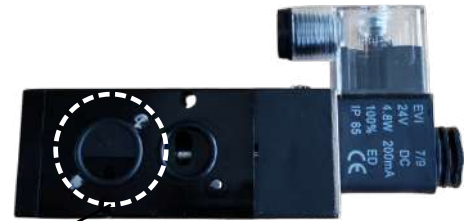




Replaceable O-ring seat
3/2 configuration for single-acting use
5/2 configuration for double-acting use
NAMUR mounting interface

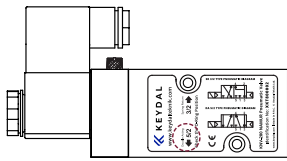

5/2 Type Adjustable Solenoid Valve

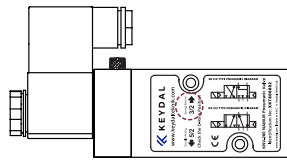

3/2 Type Adjustable Solenoid Valve

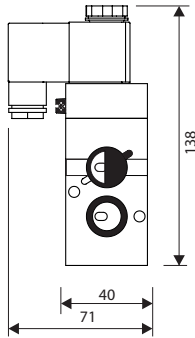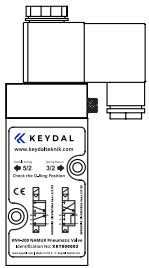

Coil options suitable for various operating conditions are available and supplied with the valve.

Explosion-proof coil options are available.

Technical Datas

Product Code	KNV-200-E	KNV-200-B	KNV-200-A	KNV-200-C	KNV-200-D
Coil Voltage	12 VDC	24 VDC	24 VAC	110 VAC	220 VAC
Power Consump.	3W	3W	5VA	5VA	5VA
Air Input	G 1/4"				
Working Pressure	1,5 - 8 bar				
Koruma Sinifi	IP65				
Temperature	0 °C ~ + 60 °C				
Flow Rate	690 Lt/min				

Spare Parts

Directional Control Valve Spare Parts List	
Model	Description
KNV200B	9mm Coil, IP65
KNV200BX	9mm Coil, Exproof
KNV200BS	Standard Type Coil Socket
KNV200BL	Led Type Coil Socket